




ROLLER CRADLES & SLINGS

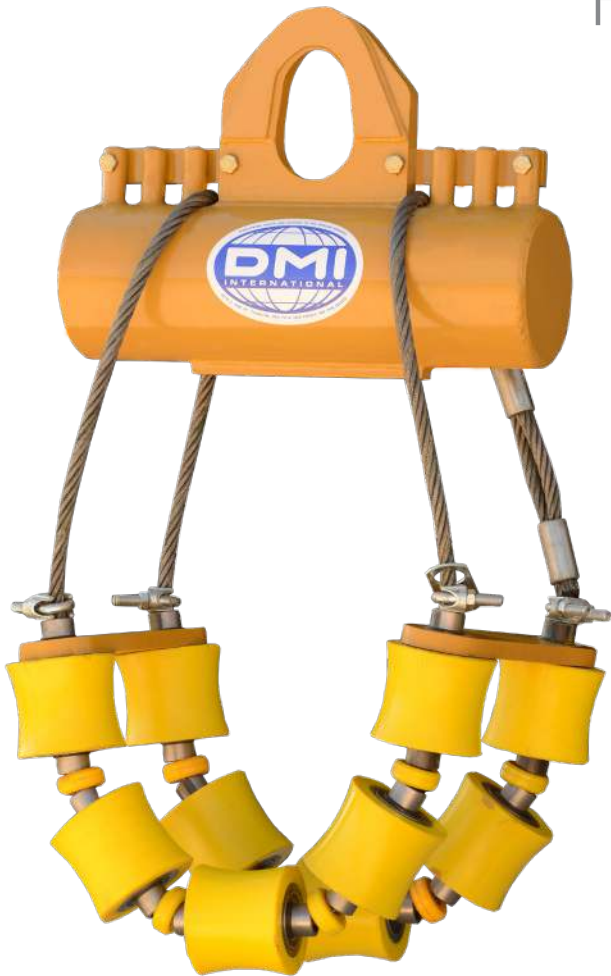

Design Features

- Various cradle assemblies for pipe sizes 6" (168MM) through 60" (1524MM) welded seam hang-up
- Slings for pipe sizes 2" (51MM) through 24" (609.6 MM)
- Designed load capacity ensures safe handling of heavy wall pipe
- Multiple urethane rollers spaced to support the pipe evenly
- The wire rope assembly meets ANSI B-30-9 sling requirements, OSHA 1910.184 sling requirements and OSHA 1926.251 material handling requirements
- **Replacement urethane cradle rollers available**

CRADLES

| SIZE | NUMBER OF ROLLERS PER ROLLER STRAND (2 ROLLER STRANDS) | MAXIMUM RECOMMENDED WORKING LOAD | |
|---------|--|----------------------------------|--------|
| | | LB | KG |
| 6"-12" | 10 | 15,600 | 7,075 |
| 12"-24" | 14 | 28,662 | 12,982 |
| 24"-36" | 12 | 56,500 | 25,628 |
| 36"-48" | 16 | 69,390 | 31,475 |
| 48"-60" | 18 | 105,380 | 47,800 |



Note: Each cradle has 2 cable strands looped over the head iron

CRADLES

| SIZE | | LENGTH | | WIDTH | | HEIGHT | | WEIGHT | |
|---------|-----------|--------|------|-------|------|--------|------|--------|------|
| IN | MM | IN | MM | IN | MM | IN | MM | LB | KG |
| 6"-12" | 152-305 | 42" | 1067 | 22" | 559 | 30" | 760 | 750 | 340 |
| 12"-24" | 305-610 | 42" | 1067 | 36" | 914 | 36" | 914 | 800 | 363 |
| 24"-36" | 610-914 | 56" | 1422 | 60" | 1524 | 36" | 914 | 2892 | 1320 |
| 36"-48" | 914-1219 | 56" | 1422 | 72" | 1829 | 42" | 1067 | 3794 | 1721 |
| 48"-60" | 1219-1524 | 56" | 1422 | 84" | 2134 | 48" | 1219 | 7240 | 3284 |


NOTE: Dimensions are with units collapsed for shipping. A safety factor of 5:1 is used to determine working loads. Capacities should be recalculated if local laws or regulations require a different safety factor.

CAUTION: Care must be taken to be sure the recommended working load is not exceeded in use.

Custom sizes available upon request.

SLINGS

| SIZE | NUMBER OF ROLLERS PER SLING | MAXIMUM RECOMMENDED WORKING LOAD | |
|---------|-----------------------------|----------------------------------|-------|
| | | LB | KG |
| 2"-8" | 3 | 15,600 | 7,075 |
| 8"-12" | 5 | 15,600 | 7,075 |
| 12"-24" | 7 | 15,600 | 7,075 |



Disclaimer:

Technical information provided for this equipment regarding performance, specifications, dimension and weights can vary depending on final configuration of the equipment. Please contact DMI International for actual specifications at time of shipment.

DMI International does not accept responsibility for errors regarding the technical information, nor the consequences of any errors, nor the consequences to changes in the specifications contained herein. DMI International reserves the right to modify the equipment performance and specifications without notice.