




16" - 48" PIPE BENDING MACHINE BENDING SETS

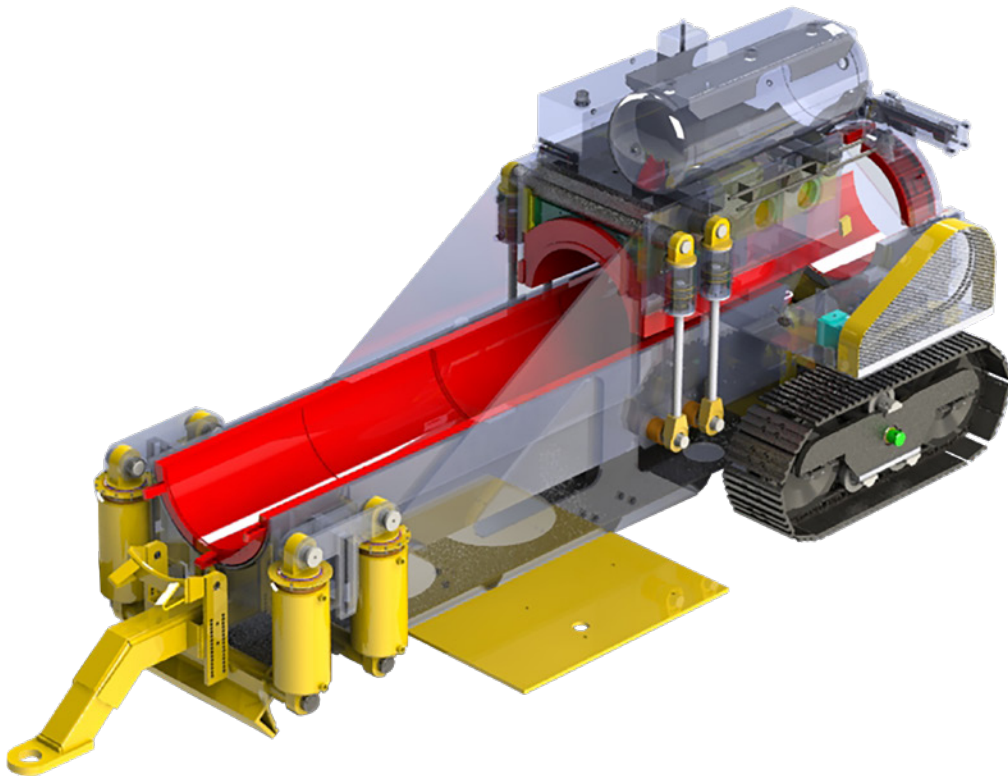

DMI bending sets and dies come bare or lined with urethane.

A bare bending set and die can be used to bend heavily coated pipe, ie: coal tar, asphalt and polyurethane coated pipe up to 5mm thick. Pipe exceeding 5mm or more in thickness will require a special bending set.

Urethane lined bending sets are used for regular epoxy coated pipe.



SPECIFICATIONS FOR SUPER 16" - 30" BENDING SETS

		LENGTH		WIDTH		HEIGHT	
		in	mm	in	mm	in	mm
Super 16 - 30	Stiffback	87	2210	30	768	15	365
	Pin Up	38	965	30	768	15	365
	Die	70	1778	38	965	27	686
	Clamps	19	483	10	254	7	178

SPECIFICATIONS FOR SUPER 22" - 36" BENDING SETS

		LENGTH		WIDTH		HEIGHT	
		in	mm	in	mm	in	mm
Super 22 - 36	Stiffback	88	2235	37	940	18	457
	Pin Up	37	940	37	940	18	457
	Die	70	1778	41	1041	25	635
	Clamps	24	610	10	254	12	305

SPECIFICATIONS FOR SUPER 32" - 42" BENDING SETS

		LENGTH		WIDTH		HEIGHT	
		in	mm	in	mm	in	mm
Super 32 - 42	Stiffback	98	2489	44	1118	20	508
	Pin Up	53	1346	44	1118	20	508
	Die	77	1956	48	1219	25	635
	Clamps	28	711	17	432	10	254

SPECIFICATIONS FOR SUPER 36" - 48" BENDING SETS

		LENGTH		WIDTH		HEIGHT	
		in	mm	in	mm	in	mm
Super 36 - 48	Stiffback (long)	114	2896	53	1346	25	635
	Stiffback (short)	99	2515	53	1346	25	635
	Pin Up	53	1346	53	1346	25	635
	Die	81	2057	54.5	1384	25	635
	Clamps	32	813	23	584	13	330