




6" - 20" PIPE BENDING MACHINE BENDING SETS

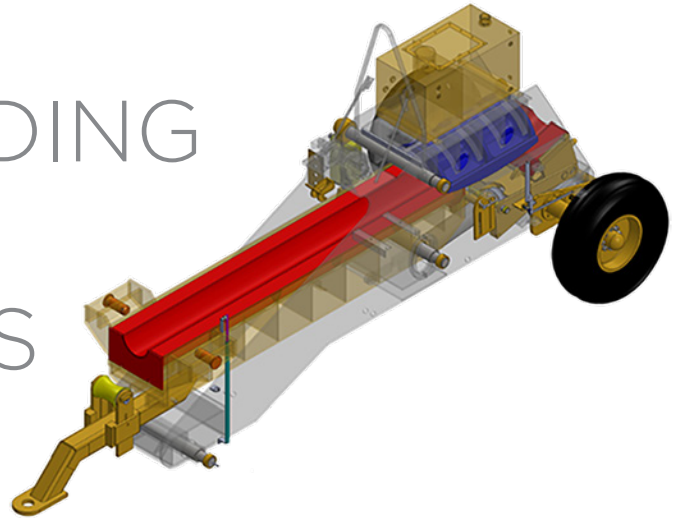

SPECIFICATIONS FOR STANDARD 6" - 20" BENDING SETS							
		LENGTH		WIDTH		HEIGHT	
		in	mm	in	mm	in	mm
Standard 6 - 20	Stiffback	85.5	2172	21.25	540	10	254
	Pin Up	13.25	337	21.25	540	10	254
	Die	41	1041	24	610	16	406

STANDARD 6" - 20"		
SIZE	WEIGHT	
	lb	kg
6"	1240	563
8"	1280	581
10"	1200	544
12"	1200	544
14"	1440	653
16"	1280	581
18"	1550	703
20"	1175	533

SPECIFICATIONS FOR SUPER 6" - 20" BENDING SETS							
		HEIGHT		LENGTH		WIDTH	
		in	mm	in	mm	in	mm
Super 6 - 20	Stiffback	120.5	3061	21.25	540	10	254
	Pin Up	13.25	337	21.25	540	10	254
	Die	41	1041	24	610	16	406

SUPER 6" - 20"		
SIZE	WEIGHT	
	lb	kg
6"	1300	590
8"	1380	626
10"	1460	662
12"	1460	662
14"	1550	703
16"	1620	735
18"	1840	835
20"	1220	553

DMI bending sets and dies come bare or lined with urethane.

A bare bending set and die can be used to bend heavily coated pipe, ie: coal tar, asphalt and polyurethane coated pipe up to 5mm thick. Pipe exceeding 5mm or more in thickness will require a special bending set.

Urethane lined bending sets are used for regular epoxy coated pipe.