





PNEUMATIC CLAMPS

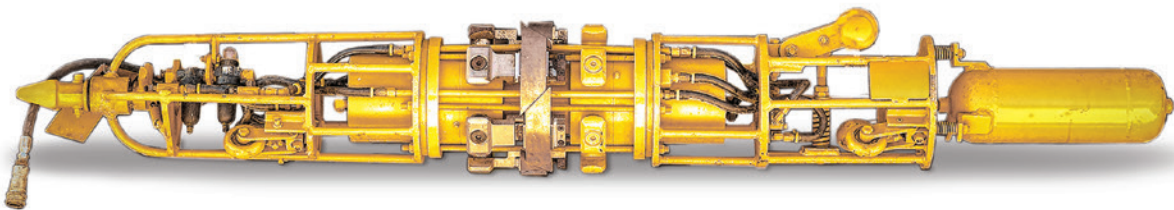

Pneumatic Clamp and Pneumatic Clamp with Copper Backup Shoes

- Standard sizes 6"-60", available upon request
- Clamps 12"-60" will cover two pipe sizes by use of conversion kits
- Adjustable for various wall thickness within clamp's range
- Powered travel drive available on models 12"-60"
- For efficient operation the compressed air pressure should be 180-200 PSI. (12.4-13.8 Bar)
- Maximum safe working pressure is 225 PSI (15.5 Bar)

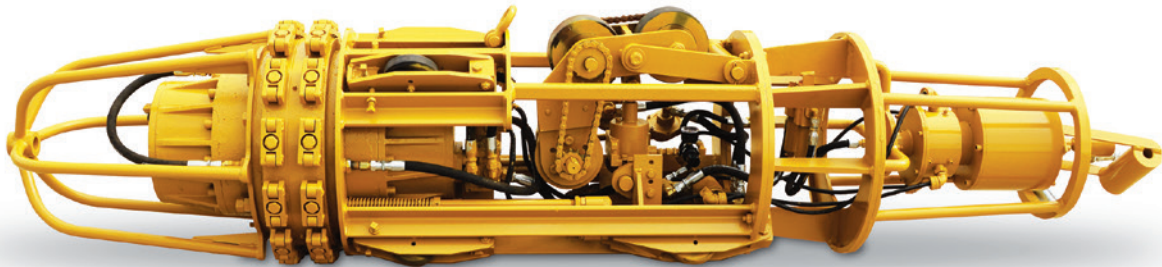

Internal Pneumatic Double Jointer Clamp

- Designed specifically for use with Double Jointer
- Available in sizes 16" to 60" and adjustable for various wall thickness within clamp's range
- Copper back-up shoes help prevent burn through
- For efficient operation the compressed air pressure should be 180-200 PSI. (12.4-13.8 Bar)
- Maximum safe working pressure is 225 PSI (15.5 Bar)
- Easy removal and installation of copper back-up shoes

NON POWERED CLAMP, PULL TYPE

MODEL	PIPE SIZE		LENGTH		WIDTH		HEIGHT		VOLUME		WEIGHT	
	inch	mm	inch	mm	inch	mm	inch	mm	cu-ft	cu-m	lbs	kg
IPLC 6	6	152	38	965	5.5	140	6.5	165	0.8	0.02	98	45
IPLC 8	8	203	50	1270	7.5	191	7.5	191	1.6	0.05	130	59
IPLC 10 2-section	10	254	58	1473	12	305	12	305	4.8	0.14	178	81
IPLC 10 3-section	10	254	58	1473	12	305	12	305	4.8	0.14	212	96
IPLC 12 2-section	12-14	324-356	60	1524	10.75	273	10.75	273	4.0	0.11	204	93
IPLC 12 3-section	12-14	324-356	60	1524	10.75	273	10.75	273	4.0	0.11	257	117
IPLC 14-16	14-16	356-406	67	1702	13	330	13.5	343	6.8	0.19	225	102
IPLC 18-20	18-20	457-508	96	2438	16.5	419	18.5	470	17.0	0.48	418	190

POWERED CLAMP, LINE TRAVEL

MODEL	PIPE SIZE		LENGTH		WIDTH		HEIGHT		VOLUME		WEIGHT		CFM
	in	mm	in	mm	in	mm	in	mm	cu-ft	cu-m	lbs	kg	
IPLC 10	10	254	62	1575	10	254	11.5	292	4.1	0.12	300	136	25
IPLC 12-14	12-14	305	109	2769	10.75	273	10.75	273	7.3	0.21	294	133	25
IPLC 14-16	14-16	356-406	112.5	2858	15	381	15	381	14.6	0.41	550	240	25
IPLC 16-18	16-18	406-457	91	2311	13	330	13	330	8.9	0.32	500	227	25
IPLC 20-22	20-22	508-559	102	2591	18	457	18	457	19.1	0.69	770	349	40
IPLC 24-26	24-26	610-660	111	2819	21	533	21	533	28.3	1.05	1010	458	40
IPLC 28-30	28-30	711-762	115	2870	28	711	28	711	52.2	1.45	1290	585	40
IPLC 30-32	30-32	762-813	115	2870	28	711	28	711	52.2	1.73	1400	635	40
IPLC 34-36	34-36	864-914	122	3099	34	864	35.5	902	85.2	2.41	1700	773	90
IPLC 36-38	36-38	914-965	128	3251	36	914	37.5	953	100.0	2.83	1750	795	90
IPLC 40-42	40-42	1016-1067	141	3581	38	965	38	965	117.8	3.94	3100	1406	90
IPLC 46-48	46-48	1168-1219	145	3683	45	1143	46.5	1181	175.6	4.97	3140	1427	90
IPLC 52-54	52-54	1321-1372	188	4775	52	1321	53.5	1359	302.7	8.57	4950	2250	90
IPLC 56	56	1422	188	4775	54	1372	55.5	1410	326.1	9.23	5400	2455	90
IPLC 60	60	1524	191	4851	58	1473	60	1524	384.7	10.89	6000	2727	90

Standard Features

- 40' reach rod (125 lbs)
- 125' air hose (25 lbs)
- Standard Steel Pipe Compatibility (24"-up)

Additional Cost Features

- Dual side drive, capability of 35 degree grade
- Stainless steel pipe compatibility
- Storage skid
- Additional reach rod
- Emergency braking system

Disclaimer:

Technical information provided for this equipment regarding performance, specifications, dimension and weights can vary depending on final configuration of the equipment. Please contact DMI International for actual specifications at time of shipment.

DMI International does not accept responsibility for errors regarding the technical information, nor the consequences of any errors, nor the consequences to changes in the specifications contained herein. DMI International reserves the right to modify the equipment performance and specifications without notice.